


Fastening windows with Winbags:




1. Place the frame on spacers into the wall opening.



2. Place a Winbag at the top and adjust in and out by pushing and pulling the window until it is at level with the facade.

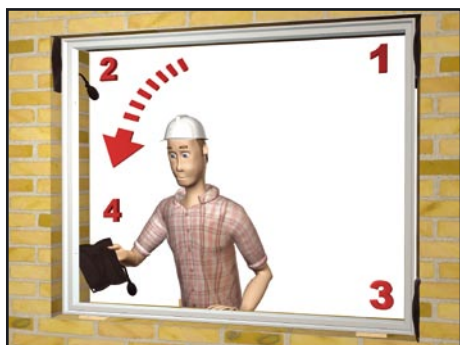

3. Now place Winbags at the sides close to the corners and finally also the one from the top.

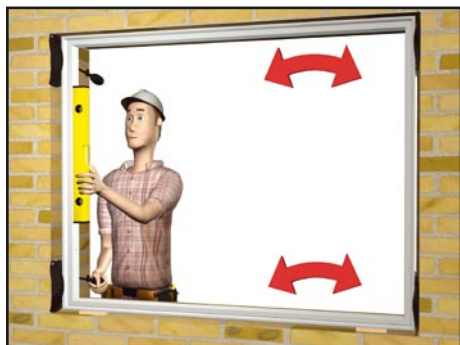

4. The window is now easily adjusted by inflating and deflating the Winbags.



5. Fasten the window, while it is kept in place by the Winbags. Remove the Winbags by deflating them. The joint is now completely empty and ready for sealing.

Winbag advantages:

- **No scratching or bruising**
The soft airbag protects frame and wall.
- **Easy and precise adjusting**
Adjusting the window into the precise position is infinitely variable and easy.
- **No consumption of wedges**
Winbags can be used over and over again - no need for different types of plastic- or wooden wedges.
- **Completely empty joints**
Ready for sealing tape or sealants.
- **Saves time**
Fastening with Winbags is quick. One person can handle adjusting and fastening even of large windows.



Technical Data:

Load capacity: 100 kg/pcs.

Joint width: 2 - 50 mm

Material:

Fiber reinforced material

Content:

4 Winbag with belthook

Pat. Pending

D.B.G.M

General notice:

Winbag is a fully tested quality product made from durable materials. However the Winbag may be punctured by sharp objects such as screws and drills. Therefore should windows be secured at all times during fastening? It is important to keep in mind that the tool should only be considered an auxiliary tool during the fastening. The pressure in the pillow element will slowly decrease. The manufacturer cannot be held responsible for any damages caused by use of Winbags.